


# PM342D


## Power Feeding IP Extender



Application Figure

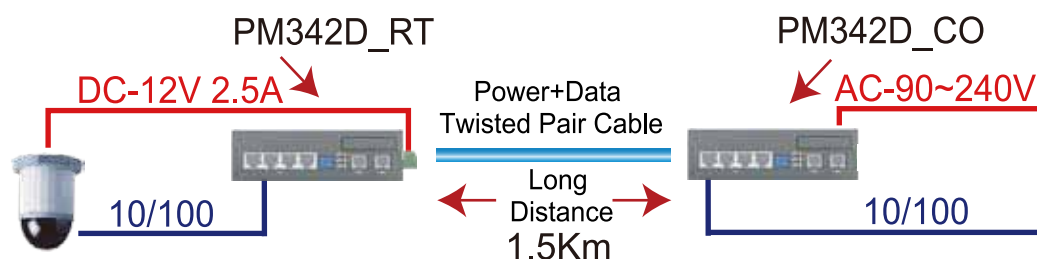

Control Center



## Key Feature

- Long data transmission range up to 1.5KM
- High transmission bandwidth: Up to 30Mbps@1.5KM
- Real time video transmission
- High power transmission for long distance: 30W (DC 12V 2.5A)@1.5KM
- Pass industry surge test of many safety regulation

## Specification

Model Name	PM342D	
Camera Type	Network Camera	
Interface	RJ-11 x 2	
Transmission Cable	Phone twisted pair(24AWG or above)	
Signal Transmit	Distance(Meter)	max 1500M
	Bandwidth UL/DL(Mbps)	1500m >=30Mbps
Power Deliver	Distance(Meter)	max 1500M
	Output	DC12V 2.5A(30W)
	Support PTZ IP cam	Yes
Power Input	AC 90-240V	
I/O	Signal LED	Yes
	Network management	Yes (with DSL QoS)
	Interface	4 X RJ-45(IEEE802.3/u; 10/100BASE-T UTP;Auto Crossover)
	LED status indicator	Yes
Dimension WxDxH(mm)	RT: 200(W) x 190(D) x 48(H) mm	
	CO: 170(W) x 170(D) x 44(H) mm	
Weight(g)	820g	
Operating Temperature	-10 to 70°C	
Operating Humidity	95% RH	
Cover	Metal cover(Black color)	
Protection	ROHS	Yes
	Grounding	Yes
	Strike protection	Yes
	SNR detection	Yes
	Surge protection	Yes
Regulation	CE / FCC Part 15 class B	
Other	Device mounting kit / screws	