


PM342E

IP Extender over Twisted Pair Cable



Application Figure

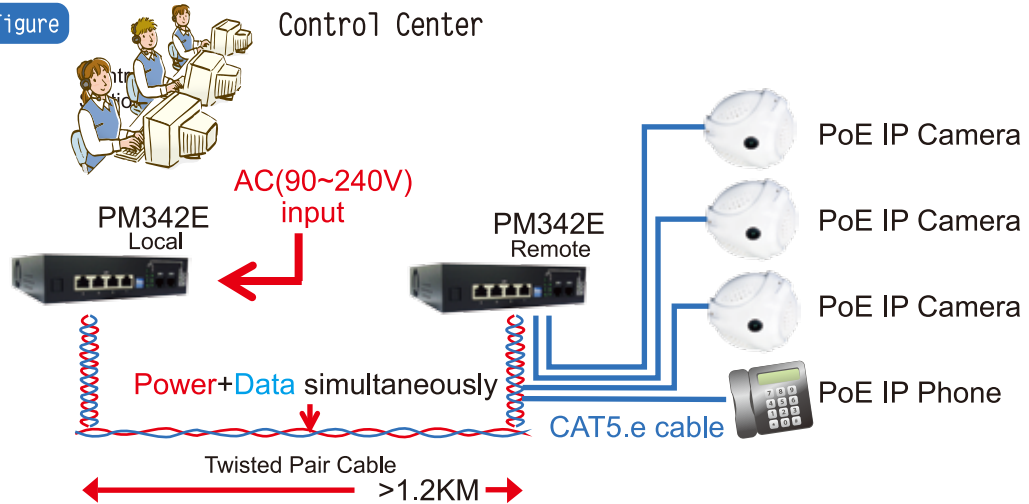

Key Feature

- Power feeding up to 19W for single port, up to 30W totally
- Twisted pair cabling
- Wide transmission bandwidth data transmission
- Long distance (37Mbps@1.2KM)
- Long distance power transmission (30W@1.2KM)
- Support PoE

Specification

Model Name	PM342E	
Camera Type	PoE Network Camera	
Interface	RJ11 x 1; Terminal block x 1	
Feature	Long distance image transmission Wide transmission bandwidth Instant video transmission With 4 ports PoE RJ-45 Use existing phone and cable system	
Applied Area	Suitable for power insufficient area	
Transmission Cable	Phone twisted pair(24AWG or above)	
Signal Transmit	Distance(Meter)	1200M
	Bandwidth UL/DL(Mbps)	37Mbps@1200M
Power Deliver	Distance(Meter)	1200M
	Output	max 30W; 19W for single port
	Support PTZ IP cam	Yes
Power Input	AC 90-240V	
I/O	Signal LED	Yes
	Network management	Yes (with DSL QoS)
	Interface	4 Ports PoE RJ-45
	LED status indicator	Yes
Dimension WxDxH(mm)	RT: 200(W)*190(D)*48(H) mm	
	CO: 170(W)*170(D)*44(H) mm	
Weight(g)	2.1KG	
Operating Temperature	-20 to 70°C	
Operating Humidity	85% RH	
Cover	Metal cover (Black color)	
Protection	ROHS	Yes
	Grounding	Yes
	Strike protection	Yes
	SNR detection	Yes
	Surge protection	Yes
Regulation	CE / FCC	
Other	Device mounting kit/ screws	