

P-415M


Megapixel Network Dome Camera



MAIN FEATURES

- MegaPixel (SXGA Resolution)
- Self-Contained Web Server providing internet capability for remote access
- SD Card backup
- Support 3GPP/Win CE cell phone
- MPEG-4 / MJPEG Dual Streaming
- Supports DDNS for dynamic IP application
- Free bundle recording software

DIMENSION DIAGRAM

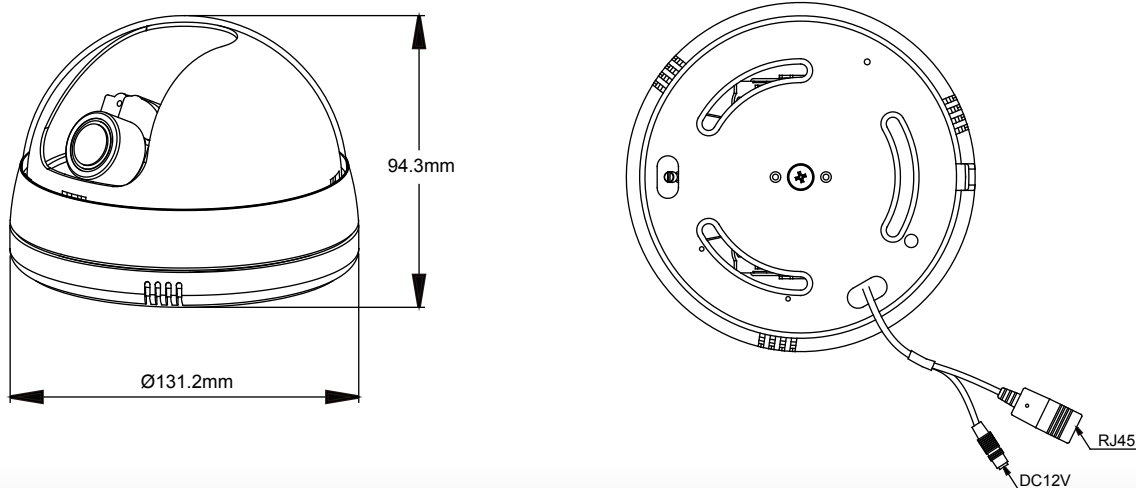

P-415M Megapixel Network Dome Camera

Specifications

Video Compression	MPEG-4 / M-JPEG Dual Streaming	
Video Resolution	SXGA: 1280 x 1024 VGA: 640 x 480 QVGA: 320 x 240 QQVGA: 160 x 120	
Bit Rate	32K ~ 2M bits/sec (CBR/VBR configurable)	
Frame Rate	Up to 30 FPS @ VGA / QVGA / QQVGA, 10 FPS @ SXGA	
Image Device	1/4" CMOS	
Lens Type	Vari-focal 3.7 to 12 mm lens	
Minimum Illumination	1.5 lux @ F1.4	
Video Control	Frame rate, Bit rate (Constant Bit Rate (CBR), Variable Bit Rate (VBR) w/ quality levels), Group of Pictures (GOP) size, Compression Format, Dual Stream, 3GPP mode, RTSP Path	
Image Adjustment	Brightness/ Contrast/ Exposure/ Sharpness/ AGC/ Night Mode	
Event System	Trigger	Motion detection, Network Disconnected, Network IP Check
	Action	FTP, Email, Save to SD card
Local Storage	SD Slot	
Network Interface	10/ 100 Base-T	
Protocols	HTTP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, 3GPP, UPnP	
Power Supply	DC 12V, 1.25A	
Power Consumption	2.4W	
Operation Temperature	0°C ~ 40°C	
Operation Humidity	0% ~ 80% RHG	
Dimension (L x W x H)	131.2mm(ψ) x 94.3mm(H)	
Net Weight	300 g	
I/O Connectors	1 x RJ-45 Ethernet connector 1 x DC In connector 1 x SD slot	
Package Contents	1 x CD (manual and software) 1 x Ethernet cable 1 x ACDC Power Adapter 1 x Tool Pack	